

APPENDIX A1

**EVA - EMP
TEST REPORT ON ENERGY CONSUMPTION
HOT & COLD DRINKS MACHINES
CATEGORY 6**

MACHINE INFORMATION

Machine Type	CinoDoppio I	
Manufacturer		
Model Number		
Serial Number		
Compressor Power (If cold drink machine only)		
Test Date	11/12/14	
Boiler Volume	3600	ml
Nominal Boiler Temperature	85	°C
Energy Saving Temperature	70	°C

TEST CONDITIONS

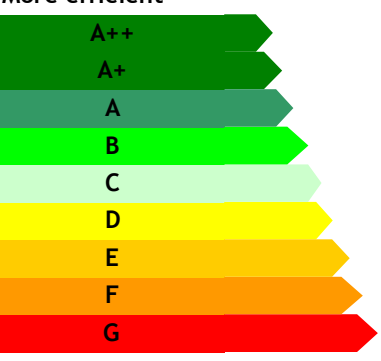
Ambient Test Temperature (°C)	24	°C
Ambient Test Relative Humidity (%)	59	%
Inlet Water Temperature (°C)	24	°C

ENERGY MEASUREMENTS HOT DRINKS

Heat Up Phase Measurement	HU	240	Watthours
Idle Phase Measurement	IM	115	Watthours/hour
Vending Phase Measurement	VM	480	Watthours
Average Drink Volume Measurement	DV	4,33	Litres
Number of Drinks delivered	NOD	30	Drinks
Average Drink Temperature Measurement	DT	76,6	°C

Cool Down Duration (from IS to ESS)	CDD		hours
Cool Down energy consumption	CD-ESM		Watthours
Energy Saving Mode measurement	ESM	80	Watthours/hour
Heat Up from Energy Saving Mode	HU-ESM	66	Watthours

Values from EVA-EMP report			
Inlet water T		24,0	°C
Idle phase	IM	115,0	wh/h
Vending phase	VM	480,0	wh
Total drink volume	DV	4,330	litres
Avg. drink temp.	DT	76,6	°C
Energy saving mode	ESM	80,0	wh/h
Duration of VM in hours e.g.4,0		1,0	hrs
No. of drinks dispensed during VM		30,0	cups

Energy		Vending machine
Manufacturer	RheaVendors Group	C
Model	CinoDoppio I	
More efficient		
		
Less efficient		
Total energy consumption	274 wh/L	
Measured at	15 L/24h	
~ no. of cups in ml	104 cups of 144 ml	
Energy consumption in Idle Mode:	2760 wh/24h	

Test Performed By: **Giuseppe Migliavacca**

Signed: **Maurilio Luca Pizzo**

Date: **14 Dic 2014**

APPENDIX A1

**EVA - EMP
TEST REPORT ON ENERGY CONSUMPTION
HOT & COLD DRINKS MACHINES
CATEGORY 6**

MACHINE INFORMATION

Machine Type	CinoDoppio E	
Manufacturer		
Model Number		
Serial Number		
Compressor Power (If cold drink machine only)		
Test Date	05/12/14	
Boiler Volume	400	ml
Nominal Boiler Temperature	92	°C
Energy Saving Temperature	70	°C

TEST CONDITIONS

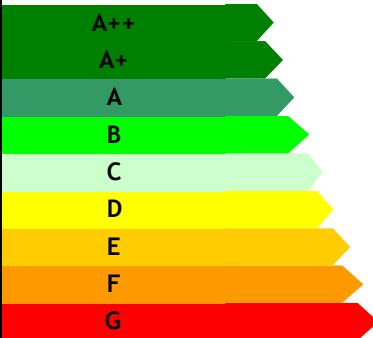
Ambient Test Temperature (°C)	24	°C
Ambient Test Relative Humidity (%)	61	%
Inlet Water Temperature (°C)	24	°C

ENERGY MEASUREMENTS HOT DRINKS

Heat Up Phase Measurement	HU	37	Watthours
Idle Phase Measurement	IM	38	Watthours/hour
Vending Phase Measurement	VM	380	Watthours
Average Drink Volume Measurement	DV	4,10	Litres
Number of Drinks delivered	NOD	30	Drinks
Average Drink Temperature Measurement	DT	76,6	°C

Cool Down Duration (from IS to ESS)	CDD		hours
Cool Down energy consumption	CD-ESM		Watthours
Energy Saving Mode measurement	ESM	32	Watthours/hour
Heat Up from Energy Saving Mode	HU-ESM	11	Watthours

Values from EVA-EMP report			
Inlet water T		24,0	°C
Idle phase	IM	38,0	wh/h
Vending phase	VM	380,0	wh
Total drink volume	DV	4,100	litres
Avg. drink temp.	DT	76,6	°C
Energy saving mode	ESM	32,0	wh/h
Duration of VM in hours e.g.4,0		1,0	hrs
No. of drinks dispensed during VM		30,0	cups

Energy		Vending machine
Manufacturer	RheaVendors Group	◀ A
Model	CinoDoppio E	
More efficient		
		
Less efficient		
Total energy consumption	150 wh/L	
Measured at	15 L/24h	
~ no. of cups in ml	110 cups of 137 ml	
Energy consumption in Idle Mode:	912 wh/24h	

Test Performed By: **Giuseppe Migliavacca**

Signed: **Maurilio Luca Pizzo**

Date: **06 Dic 2014**